



FEATURES

The CPA 12/9 – 160B domestic inline booster pump is designed to boost water pressure in a single line for both hot and cold water, that are fed from a lower pressure hot water cylinder or heater tank. With its integral flow switch to operate the pump automatically.

- Automatic boosting water pressure when tap opens.
- High quality brass body.
- Very quiet design with low vibration.
- Low power consumption.





Before Shower Booster Pump

0800 800 243

After Shower Booster Pump

SPECIFICATIONS

MODEL	PRODUCT CODE	POWER	VOLTAGE	CURRENT	INGRESS PROTECTION	INLET	OUTLET	MAX. PRESSURE	MAX CAPACITY	POWER CABLE LENGTH	WEIGHT
SHOWER HOT BOOSTER	5911001000	120W	220-240V	0.55A	IP42	15mm	15mm	9m (90kPa)	23 L/min	1.5m	2.7kg

sales@ceg.co






WARRAN


www.cep.o



TECHNICAL DATA

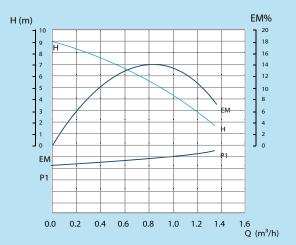

Installation Guide:

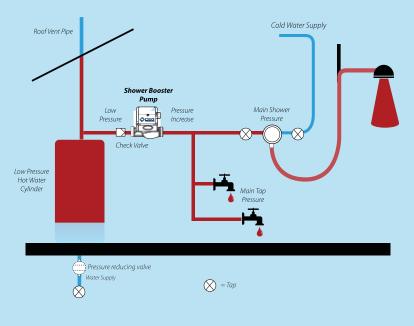

PUMP BODY	SHAFT	IMPELLER	Max Liquid Temp.
Brass	Stainless Steel AISI 420	Glass Reinforced Polymer	65°C

0800 800 243

sales@ceg.co

www.ceg.co